


วิธีการตั้งค่า D-Link รุ่น DIR-825 เป็นโหมด Repeater



รูปแบบการเชื่อมต่อ




1. เชื่อมต่อสายแลนที่ช่อง LAN ของ D-Link DIR-825 กับ LAN ของคอมพิวเตอร์ แล้วเปิด Browser ไปที่ <http://192.168.0.1> เพื่อเข้าไปตั้งค่า

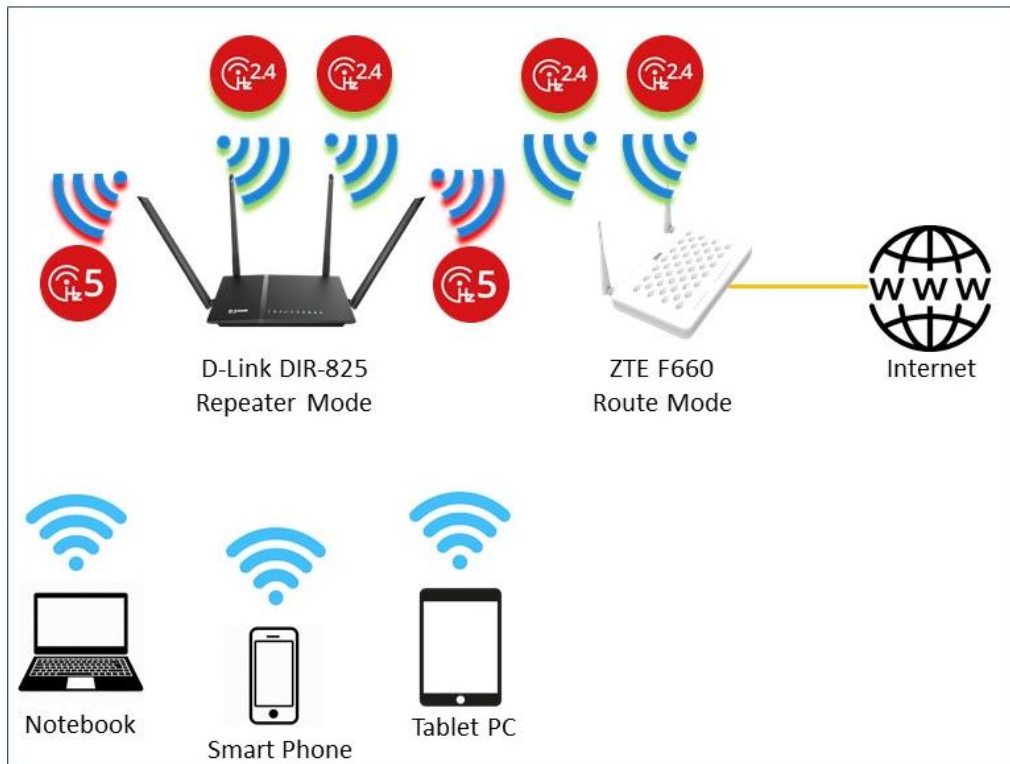

2.คลิกที่เมนู WIRELESS 2.4G ที่ Wireless Mode เลือก Repeater แล้วกด SAVE เพื่อบันทึกค่า จะมีข้อความขึ้นมาเตือนให้กด ตกลง แล้วรอ DIR-825 รีบูต

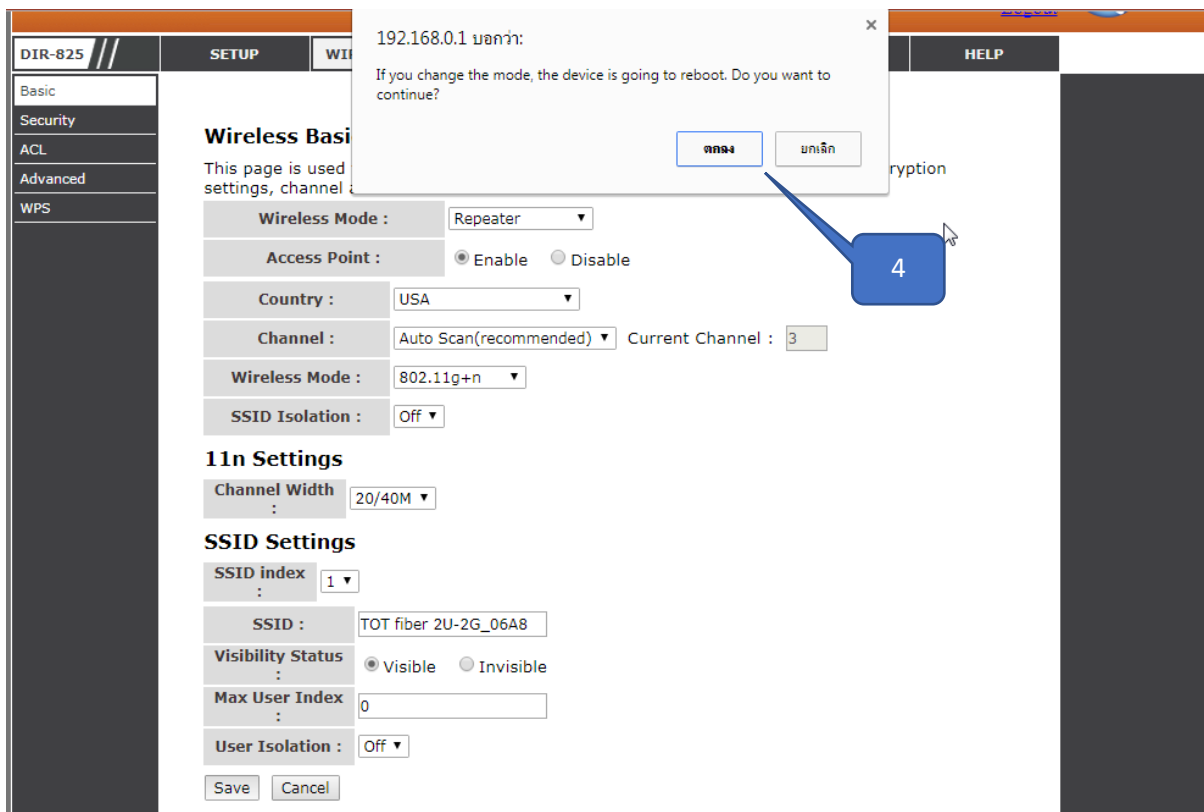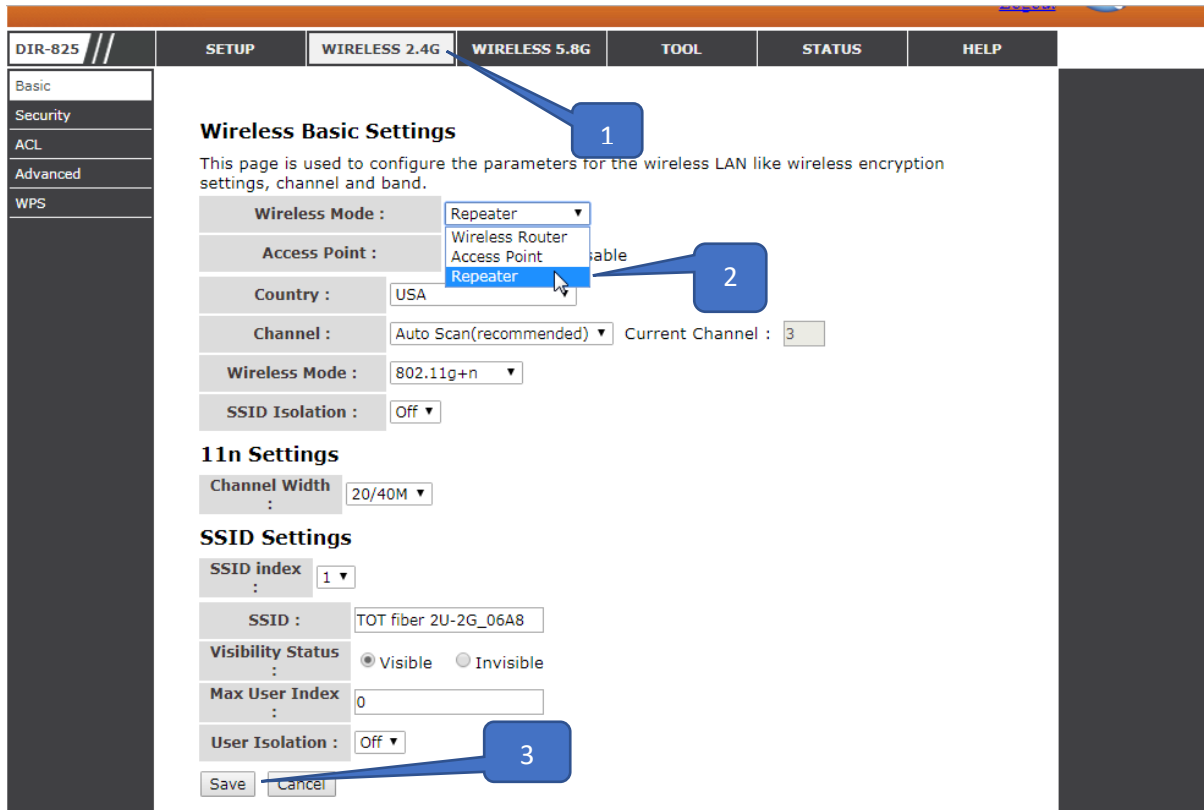

3.หลังจากรีบูตเสร็จแล้วคลิกที่เมนู WIRELESS 2.4G > Repeater จากนั้นเลือก Repeater Enable คลิก Site Survey เพื่อค้นหาสัญญาณ Wifi ที่ต้องการ Repeat สัญญาณ จากนั้น คลิก Select เลือก ชื่อ Wifi ที่ต้องการ กด Next

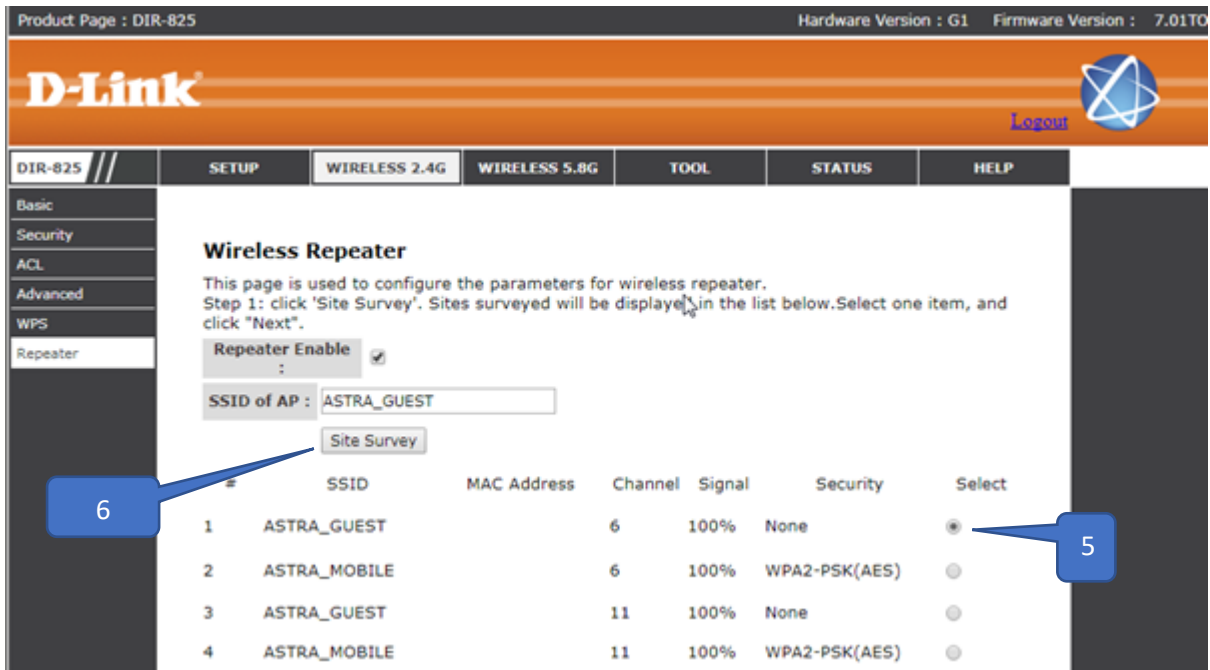

Click 'Next' to Continue repeater settings



4.กรอกค่า Wireless Pre-Share Key ของ Wifi ที่เลือก เสร็จแล้วกด Next

Product Page :DIR-825 Hardware Version :G1 Firmware Version : 7.01TO

D-Link [Logout](#)

DIR-825 // SETUP WIRELESS 2.4G WIRELESS 5.8G TOOL STATUS HELP

Basic
Security
ACL
Advanced
WPS
Repeater

Wireless Security Settings

Step2: Setup the wireless security. Turn on WEP or WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.

Encryption: WPA2-PSK(AES)

Pre-Shared Key: (8-63 ASCII or 64 hex number)

Next

8

WIRELESS

5.ตั้งค่า IP Address และ Subnet Mask ของ DIR-825 ซึ่งควรจะเป็นไอพีที่อยู่ในวงเดียวกับ Wifi ที่ไป Repeat สัญญาณ (เป็นไอพีที่ไม่มีผู้ใช้งาน) เสร็จแล้วกด Finish เป็นอันเสร็จสิ้นเป็นการตั้งค่า

Product Page :DIR-825 Hardware Version :G1 Firmware Version : 7.01TO

D-Link [Logout](#)

DIR-825 // SETUP WIRELESS 2.4G WIRELESS 5.8G TOOL STATUS HELP

Basic
Security
ACL
Advanced
WPS
Repeater

Finish Configuration

Step 3: click 'Finish' to save the configuration.
strongly recommend that you modify IP address of the local gateway to avoid IP address conflicts with the center of the AP. (ex. if IP address of AP is 192.168.1.1, you can modify IP address of the local gateway to 192.168.1.2).

IP Address: 172.16.1.69

Subnet Mask: 255.255.255.0

Finish

9

WIRELESS