


## วิธีการตั้งค่า Port Forward สำหรับอุปกรณ์ ZTE รุ่น F670L / F680


1. เชื่อมต่อสายแลนที่ช่อง LAN ของอุปกรณ์ ZTE F670L / F680 กับ LAN ของคอมพิวเตอร์ แล้วเปิด Browser เช่น Internet Explorer (IE) หรือ Google Chrome พิมพ์ <http://192.168.1.1> ช่อง address เพื่อเข้าไปตั้งค่า



2. ทำการ Login โดย Username และ Password ค่าจากโรงงานจะเป็น Username = admin Password = tot จากนั้นทำการใส่รหัส Validate Code (CAPTCHA) ให้ถูกต้อง

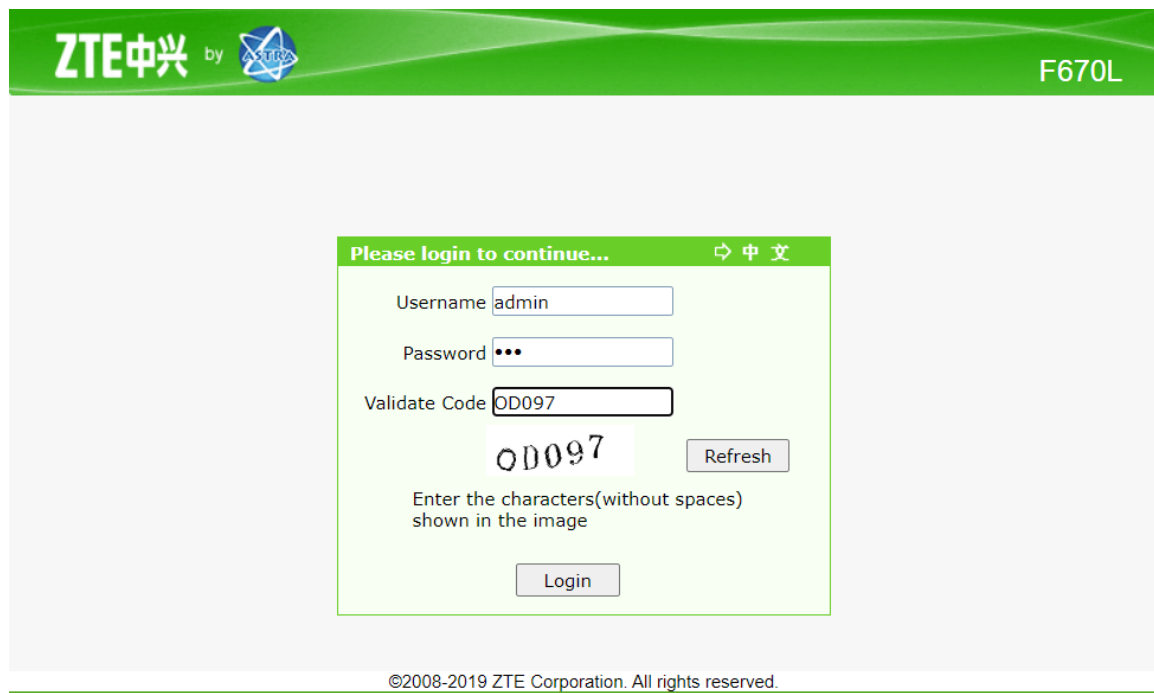

3. หลังจาก Login เรียบร้อยแล้ว การตั้งค่า Port Forward ให้ไปที่เมนู **Application > Port Forwarding**

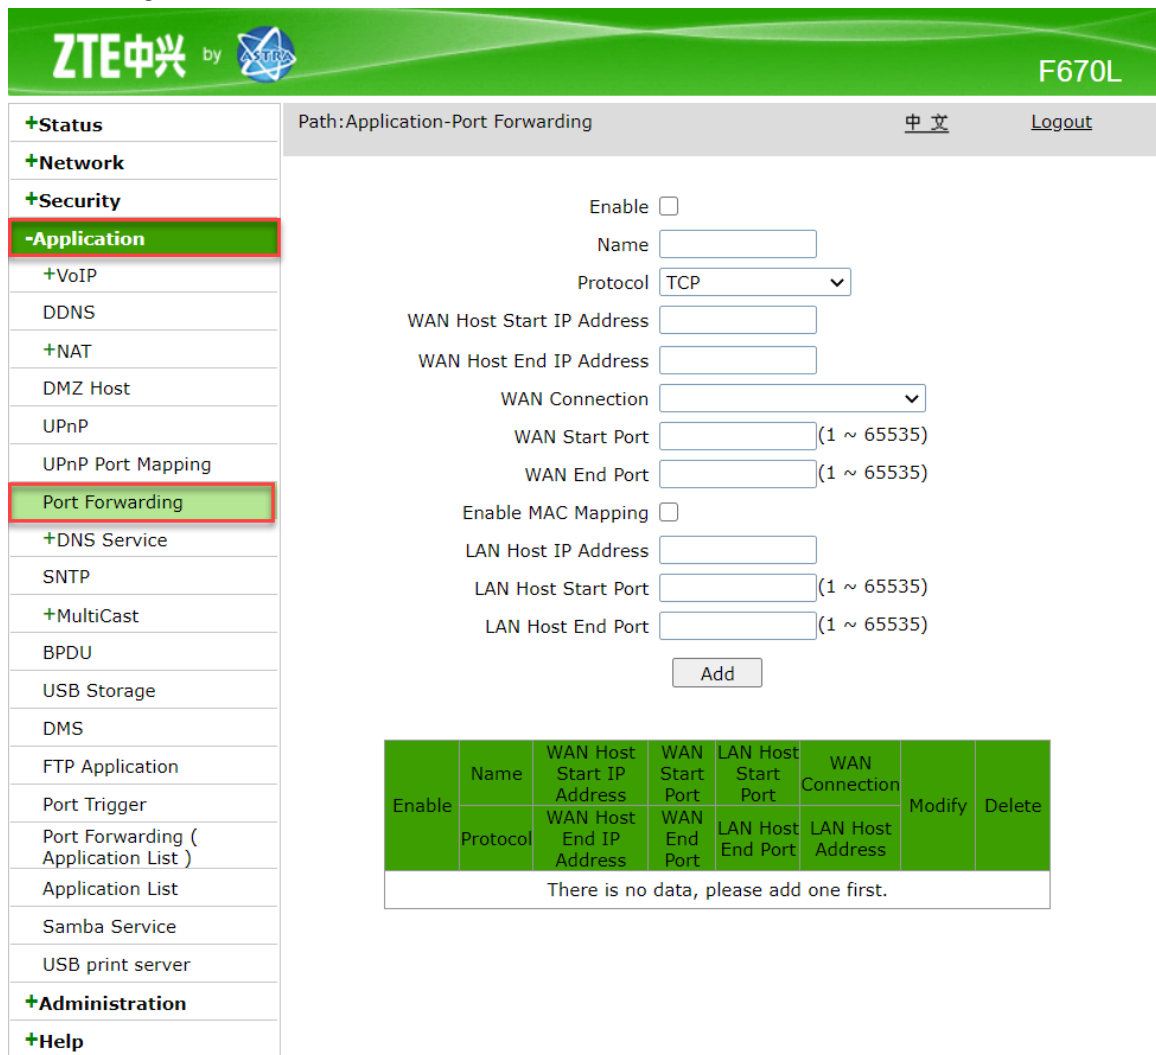

**ZTE中兴** by ASTRA F670L

Path: Application-Port Forwarding 中文 Logout

Enable

Name

Protocol TCP

WAN Host Start IP Address

WAN Host End IP Address

WAN Connection

WAN Start Port  (1 ~ 65535)

WAN End Port  (1 ~ 65535)

Enable MAC Mapping

LAN Host IP Address

LAN Host Start Port  (1 ~ 65535)

LAN Host End Port  (1 ~ 65535)

Enable	Name	WAN Host Start IP Address	WAN Start Port	LAN Host Start Port	WAN Connection	Modify	Delete
	Protocol	WAN Host End IP Address	WAN End Port	LAN Host End Port	LAN Host Address		
There is no data, please add one first.							

4. ให้คลิกที่ **Enable** หลังจากนั้น ทำการใส่ค่าให้เรียบร้อย แล้วคลิก Add

- Name สำหรับตั้งชื่อ
- Protocol สำหรับเลือก Protocol ที่ต้องการใช้
- LAN Host IP Address ให้ระบุ IP LAN ของอุปกรณ์ที่ต้องการ Forward Port
- WAN Start Port สำหรับตั้ง Port แรกของ WAN
- WAN End Port สำหรับตั้ง Port สุดท้ายของ WAN
- Lan Host Start Port สำหรับตั้ง Port แรกของ LAN
- Lan Host End Port สำหรับตั้ง Port สุดท้ายของ LAN

The screenshot shows the ZTE F670L web interface for configuring Application-Port Forwarding. The left sidebar contains a navigation menu with categories like Status, Network, Security, Application, NAT, DNS Service, MultiCast, Administration, and Help. The main content area is titled 'Path: Application-Port Forwarding' and includes a language selector (中文) and a Logout link.

The configuration form includes the following fields:

- Enable**: A checkbox, currently unchecked, highlighted with a red box.
- Name**: A text input field.
- Protocol**: A dropdown menu currently set to 'TCP'.
- WAN Host Start IP Address**: A text input field.
- WAN Host End IP Address**: A text input field.
- WAN Connection**: A dropdown menu.
- WAN Start Port**: A text input field with a range of (1 ~ 65535).
- WAN End Port**: A text input field with a range of (1 ~ 65535).
- Enable MAC Mapping**: A checkbox, currently unchecked.
- LAN Host IP Address**: A text input field.
- LAN Host Start Port**: A text input field with a range of (1 ~ 65535).
- LAN Host End Port**: A text input field with a range of (1 ~ 65535).

Below the form is an **Add** button, highlighted with a red box. At the bottom, there is a table with the following structure:

Enable	Name	WAN Host Start IP Address	WAN Start Port	LAN Host Start Port	WAN Connection	Modify	Delete
	Protocol	WAN Host End IP Address	WAN End Port	LAN Host End Port	LAN Host Address		
There is no data, please add one first.							