


วิธีการตั้งค่า TP-Link รุ่น EC231-G1u เป็นโหมด PPPoE (Quick Setup) ในการเชื่อมต่ออินเทอร์เน็ต
รูปแบบการเชื่อมต่อ

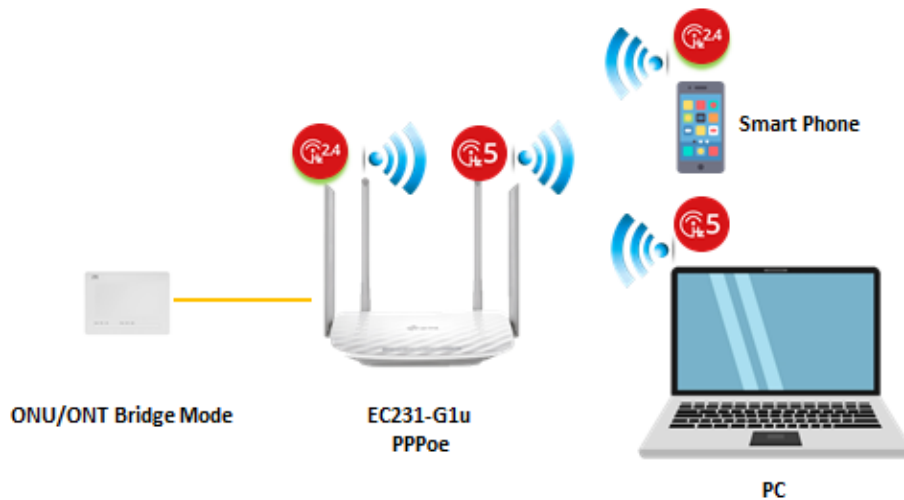

1.เปิด Browser เช่น Internet Explorer (IE) หรือ Google Chrome พิมพ์ <http://192.168.0.1> ช่อง address แล้วกดปุ่ม Enter จะขึ้นหน้าลือคอินตังภาพ ให้กรอกค่า Username เป็น admin และ Password เป็น tot และ Captcha รูปตัวเลขที่ปรากฏ แล้วคลิก Login

TOT

admin

...

p3ecl

Enter the code above here:

p3ecl

Can't read the image ? click [here](#) to refresh

Log in

2.หลังจาก Login เข้ามาจะเข้ามาที่หน้า Quick Setup ให้ทำการใส่ข้อมูลดังนี้เพื่อทำการเชื่อมต่ออินเทอร์เน็ต

- Internet Connection Type ให้ทำการเลือกใน Mode เป็น PPPoE
- Username ให้ทำการใส่เบอร์ J หรือเลขหมายวงจร ตัวอย่างเช่น 8888j8888@fttxhome
- Password ให้ทำการใส่รหัส ของเลขหมายวงจรนั้นๆ
- Confirm Password ให้ทำการคอนเฟิร์มรหัสเลขหมายวงจรอีกครั้ง

The screenshot displays the TOT Quick Setup interface. At the top, there is a teal header with the TOT logo on the left and 'Log out' and 'Reboot' buttons on the right. Below the header, there are three tabs: 'Quick Setup' (selected), 'Basic', and 'Advanced'. The main content area is titled 'Internet Connection Setup' and contains a form with the following fields:

- Internet Connection Type:** A dropdown menu set to 'PPPoE'.
- Username:** A text input field containing 'username'.
- Password:** A password input field with masked characters and a toggle icon.
- Confirm Password:** A password input field with masked characters and a toggle icon.

Below the Internet Connection Setup section is the 'Wireless Settings' section, which includes:

- 2.4GHz Wireless Network:** A checkbox labeled 'Enable' is checked.
- Network Name (SSID):** A text input field containing 'TOT fiber 2U-2.4G_95AC' and a 'Hide SSID' checkbox.
- Security:** A dropdown menu set to 'WPA/WPA2 Personal (Recommended)'.
- Password:** A text input field containing '48513531'.
- 5GHz Wireless Network:** A checkbox labeled 'Enable' is checked.
- Network Name (SSID):** A text input field containing 'TOT fiber 2U-5G_95AC' and a 'Hide SSID' checkbox.
- Security:** A dropdown menu set to 'WPA/WPA2 Personal (Recommended)'.
- Password:** A text input field containing '48513531'.

A 'Save' button is located at the bottom right of the form.

3.อุปกรณ์จะตั้งค่า WLAN SSID และ Key มาให้อยู่แล้วสามารถดูได้จากฉลากที่ติดที่ตัวอุปกรณ์ แต่สามารถเข้าไปเปลี่ยนแปลงแก้ไขได้ สำหรับไวร์เลสย่าน 2.4GHz และ 5GHz เมื่อทำการเปลี่ยนแปลงเสร็จแล้วให้ทำการกด Save ที่ด้านล่าง

- Network Name (SSID) สำหรับการตั้งชื่อไวร์เลสย่าน 2.4GHz และ 5GHz
- Password สำหรับการตั้งรหัสการเข้าใช้ไวร์เลส

The screenshot shows the 'Quick Setup' page of a TOT router. The page is divided into three tabs: 'Quick Setup', 'Basic', and 'Advanced'. The 'Quick Setup' tab is active. The page is titled 'Internet Connection Setup' and 'Wireless Settings'. Under 'Internet Connection Setup', there are fields for 'Internet Connection Type' (set to PPPoE), 'Username' (set to xxxxxxxx), 'Password' (set to), and 'Confirm Password' (set to). Under 'Wireless Settings', there are two sections: '2.4GHz Wireless Network' and '5GHz Wireless Network'. Both sections have a checkbox for 'Enable' which is checked. For the 2.4GHz network, the 'Network Name (SSID)' is 'TOT fiber 2U-2.4G_95AC', the 'Security' is 'WPA/WPA2 Personal (Recommended)', and the 'Password' is '48513531'. For the 5GHz network, the 'Network Name (SSID)' is 'TOT fiber 2U-5G_95AC', the 'Security' is 'WPA/WPA2 Personal (Recommended)', and the 'Password' is '48513531'. A 'Save' button is located at the bottom right of the page.

TOT

Quick Setup Basic Advanced

Log out Reboot

Internet Connection Setup

Internet Connection Type: PPPoE

Username: xxxxxxxx

Password:

Confirm Password:

Wireless Settings

2.4GHz Wireless Network: Enable

Network Name (SSID): TOT fiber 2U-2.4G_95AC Hide SSID

Security: WPA/WPA2 Personal (Recommended)

Password: 48513531

5GHz Wireless Network: Enable

Network Name (SSID): TOT fiber 2U-5G_95AC Hide SSID

Security: WPA/WPA2 Personal (Recommended)

Password: 48513531

Save