



## วิธีการตั้งค่ารหัส WIFI สำหรับ ONU ยี่ห้อ ZTE รุ่น F6201B ( Computer หรือ Notebook)

### รูปแบบการเชื่อมต่อ

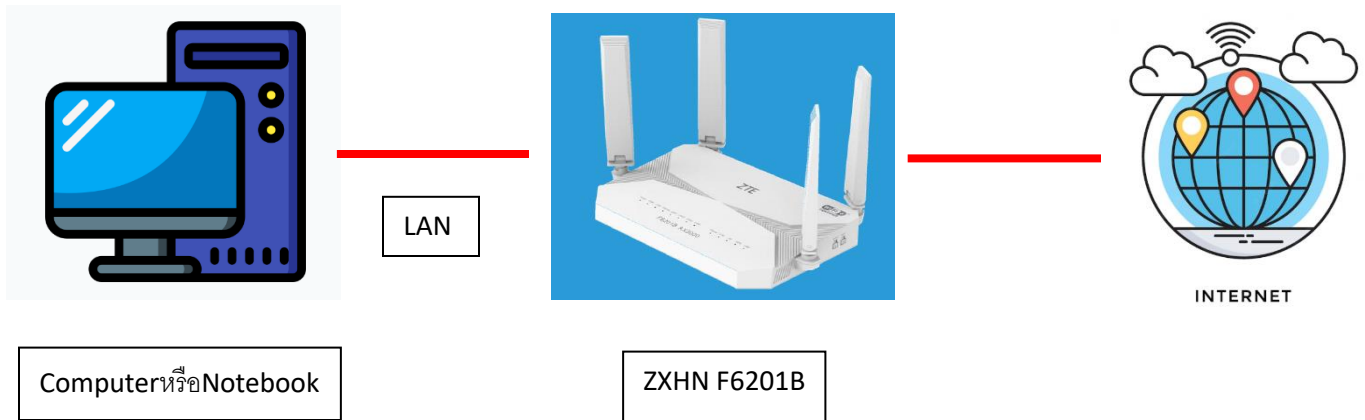

1. เชื่อมต่อสายแลนที่ช่อง LAN ของ ZTE F6201B กับ LAN ของเครื่องคอมพิวเตอร์ แล้วเปิด Browser ไปที่ <http://192.168.1.1> เพื่อเข้าไปตั้งค่า

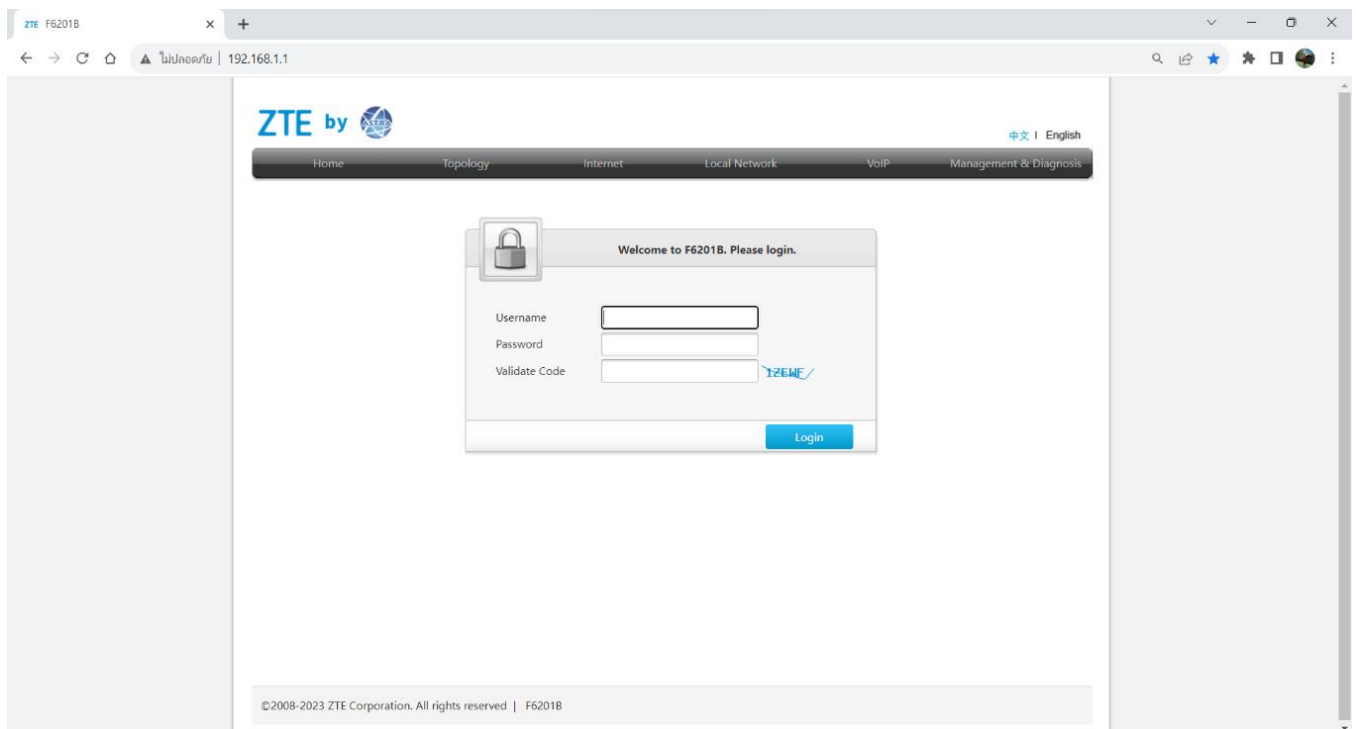

2.ทำการ Login โดยค่าเดิมของตัวอุปกรณ์ Username = admin / Password = admin / Validate Code = ตามรูปภาพด้านล่างที่แสดง แล้วทำการกดเข้า Login

ZTE by ASTRA

中文 | English

Home Topology Internet Local Network VoIP Management & Diagnosis

Welcome to F6201B. Please login.

Username admin admin

Password ..... admin

Validate Code VA551 VA551 ✓

Login

©2008-2023 ZTE Corporation. All rights reserved | F6201B

3.การตั้งชื่อ WIFI ไปที่เมนู Local Network >>> WLAN >>> WLAN SSID Configuration >>>

SSID1 (2.4GHz) ในช่อง SSID Name สามารถตั้งชื่อที่ต้องการได้ และ ในช่อง WPA Passphrase สามารถตั้งรหัสที่เราต้องการได้ หลังจากตั้งเสร็จให้กด Apply เพื่อบันทึกค่า.

The screenshot shows the ZTE router's web interface. At the top, the ZTE logo and 'by ASTRA' are visible. The current time is 2023-08-23T16:39. The user is logged in as 'admin'. The navigation menu includes Home, Topology, Internet, Local Network (highlighted with a blue box and labeled '1.'), VoIP, and Management & Diagnosis. On the left, a sidebar menu shows Status (labeled '2.'), WLAN (highlighted with a blue box), LAN, Routing, FTP, UPnP, BPDU, DMS/DLNA, Samba Service, DNS, and USB. The main content area has tabs for WLAN Basic (selected), WLAN Advanced, Mesh WiFi, WPS, and Surrounding WiFi. Under 'Page Information', it states: 'This page provides the function of WLAN basic parameter(s) configuration.' There are two expandable sections: 'WLAN On/Off Configuration' and 'WLAN Global Configuration' (labeled '3.'). The 'WLAN Global Configuration' section is expanded to show 'WLAN SSID Configuration' (labeled '3.'). Under this section, 'SSID1 (2.4GHz)' is selected (labeled '4.'). A note indicates that a strong password should match these rules: 1. It should have at least 8 characters. 2. It should be composed of digits, alphabet and special symbols. 3. It should not have context relationship with the username, such as the same or inverse. The configuration fields are: SSID Name (WIFI 6201B-2G, highlighted with a red box and labeled 'ตั้งชื่อ'), SSID Hide (Off), Encryption Type (WPA2-PSK-AES), WPA Passphrase (Araikodai18, highlighted with a red box and labeled 'ตั้งรหัส'), SSID Isolation (Off), and Maximum Clients (32). At the bottom right, there are 'Apply' and 'Cancel' buttons, with 'Apply' highlighted by a red box.

4.การตั้งชื่อ WIFI ไปที่เมนู Local Network >>> WLAN >>> WLAN SSID Configuration >>>

SSID5 (5GHz) ในช่อง SSID Name สามารถตั้งชื่อที่ต้องการได้ และ ในช่อง WPA Passphrase สามารถตั้งรหัสที่เราต้องการได้ หลังจากตั้งเสร็จให้กด Apply เพื่อบันทึกค่า.

The screenshot shows the ZTE router's web interface. At the top, the 'Local Network' menu item is highlighted with a blue box and labeled '1.'. On the left sidebar, the 'WLAN' menu item is highlighted with a blue box and labeled '2.'. In the main content area, the 'WLAN SSID Configuration' section is expanded with a blue box and labeled '3.'. Within this section, the 'SSID5 (5GHz)' configuration is selected with a blue box and labeled '4.'. The configuration fields for SSID5 are: SSID Name (A60 LED - 6500K DAYLIGHT), SSID Hide (Off), Encryption Type (WPA2-PSK-AES), WPA Passphrase (1234567890), SSID Isolation (Off), and Maximum Clients (32). The 'Apply' button at the bottom right is highlighted with a red box.

Current Time: 2023-08-23T16:36

admin Logout 中文 | English

Home Topology Internet **Local Network** VoIP Management & Diagnosis

Status **2.**

WLAN

LAN

Routing

FTP

UPnP

BPDU

DMS/DLNA

Samba Service

DNS

USB

WLAN Basic | WLAN Advanced | Mesh WIFI | WPS | Surrounding WIFI

Page Information

This page provides the function of WLAN basic parameter(s) configuration.

▶ WLAN On/Off Configuration

▶ WLAN Global Configuration

**3.**

▼ **WLAN SSID Configuration**

▶ SSID1 (2.4GHz)  On  Off

▶ SSID2 (2.4GHz)  On  Off

▶ SSID3 (2.4GHz)  On  Off

▶ SSID4 (2.4GHz)  On  Off

**4.**

▼ **SSID5 (5GHz)**

**ตั้งชื่อ**

SSID Name

SSID Hide  On  Off

Encryption Type

**ตั้งรหัส**

WPA Passphrase

SSID Isolation  On  Off

Maximum Clients