


วิธีการตั้งค่า Port Forward อุปกรณ์ ZTE H8102E

รูปแบบการเชื่อมต่อ



1. เปิด Browser เช่น Internet Explorer (IE) หรือ Google Chrome พิมพ์ <http://192.168.1.1> ช่อง address แล้วกดปุ่ม Enter จะขึ้นหน้าล็อกอินดังภาพ ให้กรอกค่า Username เป็น admin และ Password ตามค่าที่ระบุไว้ที่ตัวฉลากของอุปกรณ์ และ Captcha รูปตัวเลขที่ปรากฏ แล้วคลิก Login

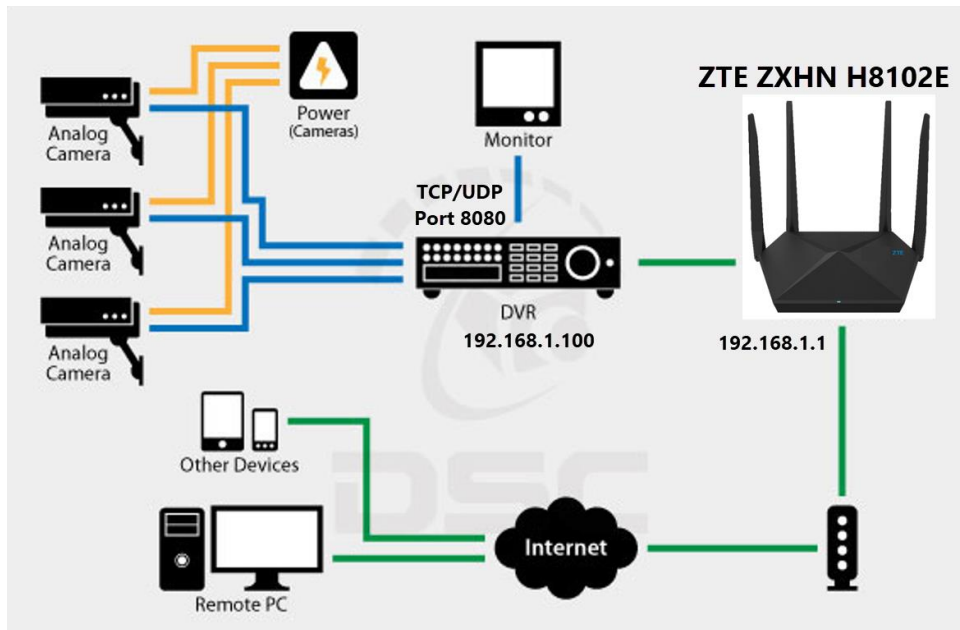

Welcome to H8102E. Please login.

Username:

Password:

Validate Code: YJ8YFR

Login

2.หลังจาก Login เข้ามาที่หน้า Home ให้คลิกที่เมนู Internet > Security > Port Forwarding

The screenshot shows the TOT router's web interface. At the top, the current time is 2021-06-29T16:04. The user is logged in as 'superadmin'. The navigation menu includes Home, Internet (highlighted with a red box), Local Network, and Management & Diagnosis. On the left sidebar, the 'Security' menu item is highlighted with a red box. The main content area is titled 'Ethernet' and contains 'Page Information' (stating it shows the status of Ethernet) and 'Ethernet Interface Information'.

Interface Name	WAN
MAC Address	a8:02:db:d5:29:28
Status	Up
Mode	1000M Full Duplex
Packets Received/Bytes Received	463398/96735505
Packets Sent/Bytes Sent	19648/6264616

Refresh

The screenshot shows the 'Port Forwarding' configuration page in the TOT router's web interface. The current time is 2021-06-29T16:06. The user is logged in as 'superadmin'. The navigation menu includes Home, Internet, Local Network, and Management & Diagnosis. On the left sidebar, the 'Security' menu item is highlighted with a red box. The main content area is titled 'Port Forwarding' and contains 'Page Information' (stating it provides the function of port forwarding parameter(s) configuration) and a configuration form.

What should be noticed when configuring port forwarding?

New Item On Off

Name:

Protocol: TCP

WAN Host IP Address: 0 . 0 . 0 . 0 ~ 0 . 0 . 0 . 0

LAN Host:

WAN Port: ~

LAN Host Port: ~

Apply Cancel

Create New Item

- On New Item
- Name สำหรับตั้งชื่อ
- Protocol สำหรับเลือก Protocol ที่ต้องการใช้
- WAN Host IP Address ไม่ต้องตั้ง
- LAN Host ให้ระบุ IP LAN อุปกรณ์ที่ต้องการ Forward Port
- WAN Port สำหรับตั้ง Port ของ WAN
- Lan Host Port สำหรับตั้ง Port ของ LAN

ตัวอย่าง

The screenshot displays the TOT router's web management interface. At the top, the current time is 2021-06-30T14:28, and the user is logged in as 'admin'. The navigation menu includes Home, Internet, Local Network, and Management & Diagnosis. The 'Port Forwarding' tab is selected and highlighted with a red box. The left sidebar shows various configuration options, with 'Security' expanded to show 'Port Forwarding'. The main content area shows 'Page Information' and a 'Port Forwarding' section. A 'New Item' form is open, with the following fields: Name (DVR), Protocol (TCP And UDP), WAN Host IP Address (0.0.0.0), LAN Host (192.168.1.100), WAN Port (8080), and LAN Host Port (8080). The 'Apply' button is highlighted with a red box.