

วิธีการตั้งค่า Wi-Fi NR3661 ใช้งานอินเทอร์เน็ต โดยซิม TOT Mobile 4G LTE 2300 MHz



1.เชื่อมต่ออุปกรณ์ผ่าน LAN หรือ connect WIFI แล้วเปิด Browser เช่น Internet Explorer (IE) หรือ Google Chrome พิมพ์ <http://192.168.1.1> กดปุ่ม Enter จะปรากฏหน้าต่าง Status ให้เลือก login ที่มุมขวาบน

A screenshot of the router's web interface showing the status page. The page has a blue header with the 4G LTE logo on the left and status indicators (VOIP, 3G, 52015, signal strength, globe, refresh, login) on the right. The main content is a table with two columns: parameter name and value. The table is divided into sections: Status, Internet Usage, and LTE Signal Status.


Status	
Platform Version	V3
SIM Status	Normal
Network Mode	3G
IPv4 Status	Connected
WAN IP Address	172.33.4.86
IPv4 DNS	172.24.88.164,172.24.24.164
3G Signal Strength(dBm)	-56
LTE Signal Strength(dBm)	-
Internet Usage	
Total Traffic	-
Uplink Traffic	-
Downlink Traffic	-
Uplink Rate	-
Downlink Rate	-
Run Time	01:11:15
LTE Signal Status	
PLMN	52015/52015
Service Status	Normal
PhysCellId	89
Cell Id	0164907-025
RSRQ(dB)	107
RSRP(dBm)	-
SINR	-20
Roaming	No
BAND	1
MCS	-
CQI	-
RSSI(dBm)	-56

2. Login ให้ใส่ Username : **admin** , Password : **tot**

TURBOSPEED™

3G 52015    

Refresh

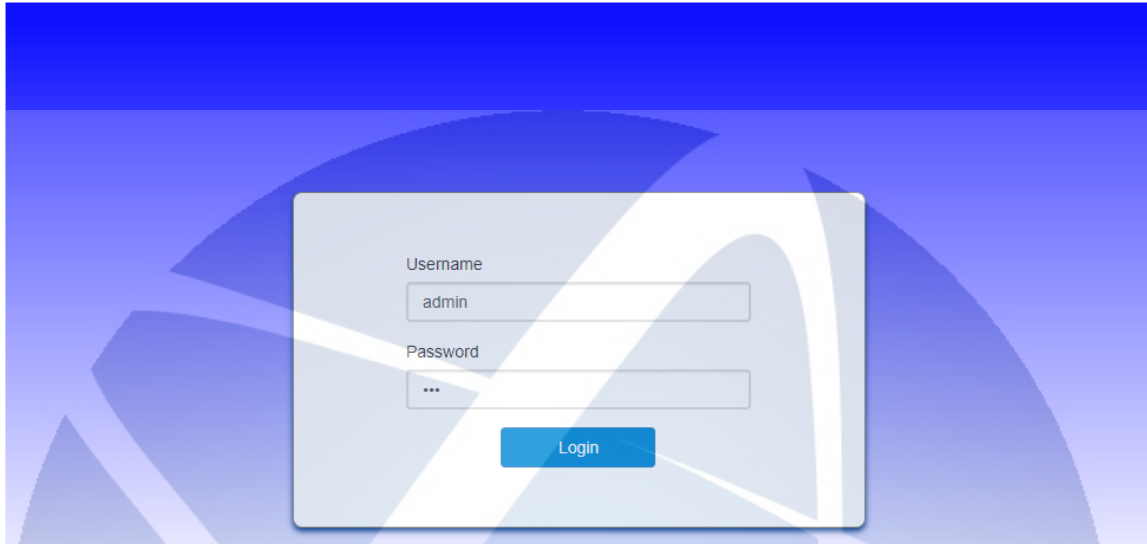

3.เลือก Internet Connection จาก “ON” ให้เป็น “OFF”

Internet	Settings	Internet	Settings
Internet Connection	<input checked="" type="checkbox"/>	Internet Connection	<input type="checkbox"/>
IMEI	353246060418490	IMEI	353246060418490
IMSI	520151100904451	IMSI	520151100904451
LAN Domain	m.home	LAN Domain	m.home
WAN IP Address	172.33.4.86	WAN IP Address	--
WAN IPv6 Address	--	WAN IPv6 Address	--
Statistics	Settings	Statistics	Settings
Used	-	Used	-
Total	-	Total	-

4.เลือก Device Settings>Internet settings>Network Selection เปลี่ยน Network Selection ให้เป็น “Automatic” แล้วกด Apply

The image shows two screenshots of the TURBOSPEED mobile interface. The top screenshot is the 'Device Settings' screen. On the left sidebar, 'Internet Settings' is highlighted with a red box. The main content area shows 'Wireless Access Device' and 'Cable Access Devices' sections. The 'Cable Access Devices' section contains a table with the following data:

No.	Host Name	IP Address	MAC Address
1	Yai-PC	192.168.1.112	28:D2:44:...

The bottom screenshot is the 'Connection Settings' screen. On the left sidebar, 'Network Selection' is highlighted with a blue box. The main content area shows 'Network Selection' with a dropdown menu set to 'Automatic', which is also highlighted with a red box. An 'Apply' button is visible at the bottom right.

5.เลือก Home จากนั้นให้กด Internet Connection เป็น จาก “OFF” ให้เป็น “ON”

Internet	Settings	Internet	Settings
Internet Connection	<input type="checkbox"/> OFF	Internet Connection	<input checked="" type="checkbox"/> ON
IMEI	353246060418490	IMEI	353246060418490
IMSI	520171101727056	IMSI	520171101727056
LAN Domain	m.home	LAN Domain	m.home
WAN IP Address	---	WAN IP Address	10.181.255.41
WAN IPv6 Address	---	WAN IPv6 Address	---
Statistics	Settings	Statistics	Settings
Used	-	Used	-
Total	-	Total	-

6.สถานะของ Network Type จะเปลี่ยนจาก 3G เป็น LTE และ ที่รูปลูกโลกที่แสดงสถานการณ์เชื่อมต่ออินเทอร์เน็ตจะมีลูกศรสีเขียว ขึ้น-ลง ขณะมีการใช้งานอินเทอร์เน็ต

4G LTE

LTE 52015

Logout

ASTRA

สอบถามข้อมูลเพิ่มเติม กรุณาติดต่อ
บริษัท แอสตรา คอมมิวนิเคชั่น เซอร์วิส จำกัด
โทรศัพท์ : 0-2116-3999 โทรสาร : 0-2014-2988
www.astra.co.th

Line Support
@astra

